



**UC94-OBF
FRONT MOUNT
CYLINDER FOR
OUTBOARD
ENGINES
UP TO 150 HP
TOTAL**



UC94-OBF - Balanced: the number of turns lock-to-lock is equal port to starboard or vice-versa



UC94-OBF/1 40154 F




UC94-OBF/3 40161 C

SPECIFICATIONS	UC94-OBF/1 - /3
Volume	94 cc - 5.7 cu. in
Output force	278 kg - 613 lbs
Inside diameter	30 mm - 1.18"
Stroke	186 mm - 7.3"
3/8" Fittings	For high pressure flex hose

Innovative new design with bushings to prevent friction between cylinder mounting rod and tilt tube (PATENTED)

SPLASHWELL DIMENSION REQUIREMENTS			
Engine No.	A	B	C
1	550 mm - 21.25"	152 mm - 5.98"	152 mm - 5.98"
2	1110 mm - 43.70"	152 mm - 5.98"	152 mm - 5.98"

For twin engine applications, the minimum distance between the two engine centers is 21.6" (550 mm)

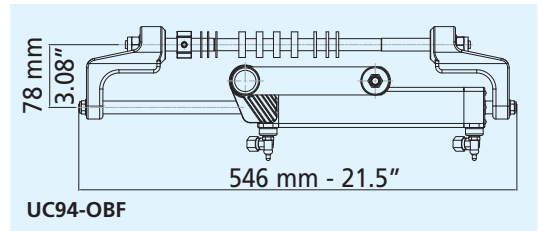

APPLICATIONS

WARNING
The UC94-OBF front mount cylinder is recommended for use with outboard engines 150 hp total and less

ENGINE	POWER	YEAR	CYLINDER	P. No.
Mercury® Mariner®	F50 EFI – F60 EFI 4T	2004	UC94-OBF/1	40154F
	F75 – F90 4T	2000 to date	UC94-OBF/1	40154F
	115 EFI 4T	2001 to date	UC94-OBF/1	40154F
	75 – 90 – 115 OPTIMAX 2T	2004	UC94-OBF/3	40161C
	135 – 150 OPTIMAX 2T	1999 to date	UC94-OBF/1	40154F
	75 – 90 2T	1990 to date	UC94-OBF/1	40154F
Yamaha®	F80A - F100A 4T	1999 to date	UC94-OBF/1	40154F
	F115A 4T	2000 to date	UC94-OBF/1	40154F
	F150A 4T	2004	UC94-OBF/1	40154F
	75C 2T	1998 to date	UC94-OBF/1	40154F
	115C - 130B 2T	1990 to date	UC94-OBF/1	40154F
	150F 2T	1996 to date	UC94-OBF/1	40154F
150 HPDI 2T	2000 to date	UC94-OBF/1	40154F	
Honda®	BF75A – BF90A 4T	1995 to date	UC94-OBF/1	40154F
	BF115A – BF130A 4T	1998 to date	UC94-OBF/3	40161C
Johnson®	J50 2T	2004	UC94-OBF/1	40154F
	J90 – J115 2T	1995 to date	UC94-OBF/1	40154F
	J150 2T	1995 to date	UC94-OBF/1	40154F
	BJ60 – BJ70 4T	2001 to date	UC94-OBF/1	40154F
	BJ90 – BJ115 - BJ 140 4T	2001 to date	UC94-OBF/1	40154F
Suzuki®	DF70 4T	1998 to date	UC94-OBF/1	40154F
	DF90 – DF115 – DF140 4T	1998 to date	UC94-OBF/1	40154F
Evinrude®	E100 – E115 2T	1995 to date	UC94-OBF/1	40154F
	E135 – E150 2T	1995 to date	UC94-OBF/1	40154F
	40 – 50 - 60 E-TEC 2T	2004	UC94-OBF/1	40154F
	75 – 90 E-TEC 2T	2004	UC94-OBF/1	40154F
Selva®	MARLIN 100 4T	2001 to date	UC94-OBF/1	40154F
	NARWHAL 115 4T	2001 to date	UC94-OBF/1	40154F
Tohatsu®	40-50 TLDI 2T	2004	UC94-OBF/1	40154F
	70-90 TLDI 2T	2004	UC94-OBF/1	40154F
	M60-M70 2T	2004	UC94-OBF/1	40154F
	M90 2T	2004	UC94-OBF/1	40154F
	M120-M140 2T	2004	UC94-OBF/1	40154F

WARNING
These recommendations should be used as a general reference only. For any further information please contact our Technical Service.